

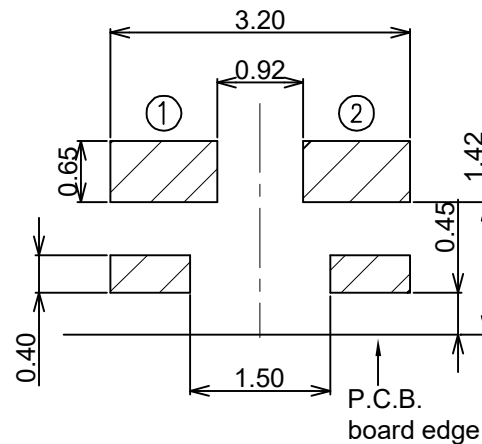
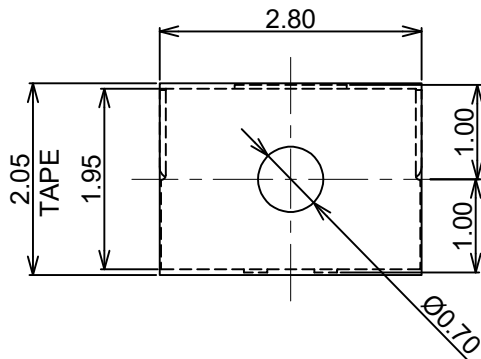
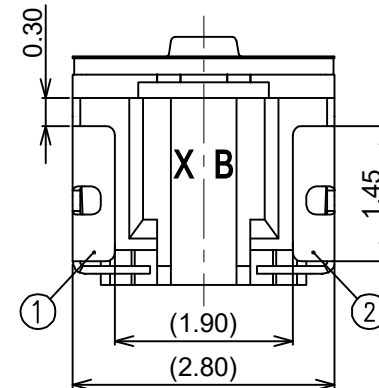
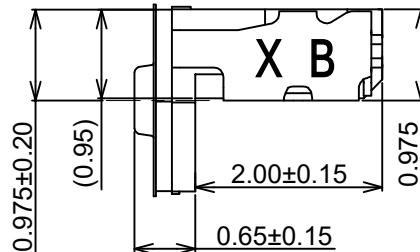


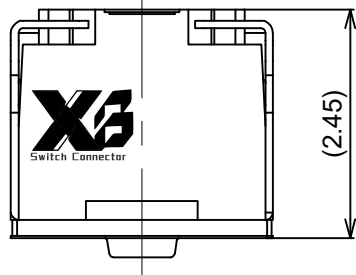

P.C.B. Layout(Tolerances $\pm 0.05\text{mm}$)



Circuit Diagram

G-Switch Specification:
OPERATING FORCE: $160 \pm 50\text{gf}$

Travel: $0.13 \pm 0.05\text{mm}$

Operating temperature range: -40°C to $+85^\circ\text{C}$



Rating: 50mA.12V DC

Insulation resistance: $\geq 100\text{M}\Omega$ min.100V DC

Dielectric strength: 250V AC for 1 min

Contact resistance: $\leq 100\text{m}\Omega$ max.

LIFE: 300,000 cycles



东莞市铭标电子科技有限公司
Ming Mark Electronic Technology Co., Ltd.

RoHS

Unless otherwise specified, Tolerance:
X. ± 0.30
X.x ± 0.20
X.xx ± 0.15
X.xxx ± 0.10
Angles $\pm 3^\circ$

DESIGN Dome	DATE 2022.09.20
CHECKED	DATE
APPROVED	DATE

Molde code:
TAM15-J-R

REV.: X1	SCALE: 4:1	UNIT: mm
SIZE: A4	SHEET: 1/1	