

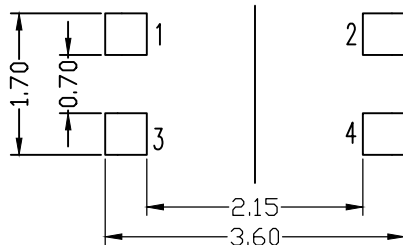

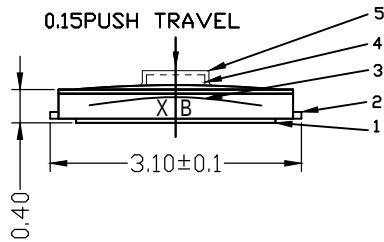




REV.	DESCRIPTION	DATE	DRAWN	CHECKED	APVD.	 CIRCUIT DIAGRAM
A		18/04/13	Yong Zeng	Kai Zhang	Yunfeng Fu	




Without any banned substance! Compliance with RoHS!

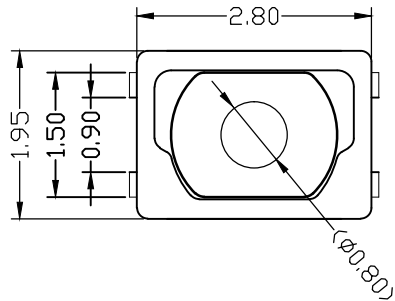

Recommended PAD Layout $\phi \pm 0.05$


Recommended solder thickness: $T=0.10 \pm 0.01$

1. RATING: DC 12V, 50mA Max
2. OPERATING FORCE: 200 ± 40 gf
3. TRAVEL: 0.15 ± 0.1 mm
4. LIFE: 300,000 cycles
5. PACKAGE: 10000Pcs/Reel

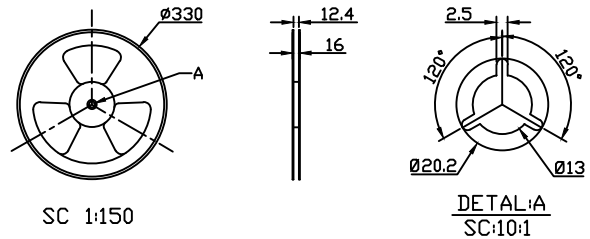

SC 1:10

编带的透明带剥离强度标准: 30~100gf

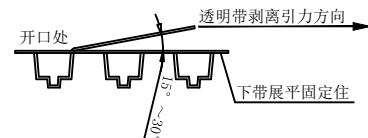

6						谊嘉电子科技有限公司 CNJC ELECTRONICS CO., LTD				
5	COVER	1	PI	BLACK		TOLERANCES UNLESS OTHERWISE SPECIFIED	CLASS: ☐ CONFIDENTIAL ☐ SECRET ☒ GENERAL			
4	KNDB	1	PI	BLACK		WITHIN: 1.5mm±0.1mm OVER: 1.5mm±0.2mm	NAME: THIN FILM SWITCH			
3	CONTACT	2	SUS	Ag-Plate			PART NO. TF2819-AABB-S4N20A			
2	TERMINAL	2	PHOSPHOR BRONZE	Ag-Plate	APPD: Yunfeng Fu 04/23'18					
1	CASE	1	LCP	BLACK	CHKD: Kai Zhang 04/23'18					
ITEM	PART NAME	Q'TY	MATERIAL	FINISH	DR: Yong Zeng 04/23'18		UNIT	SCALE	SHEET	REV
							mm	1:1	1/1	A