

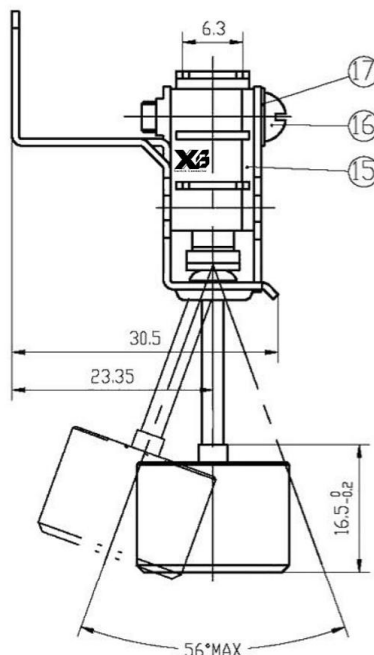


CAD FILE:

ROHS

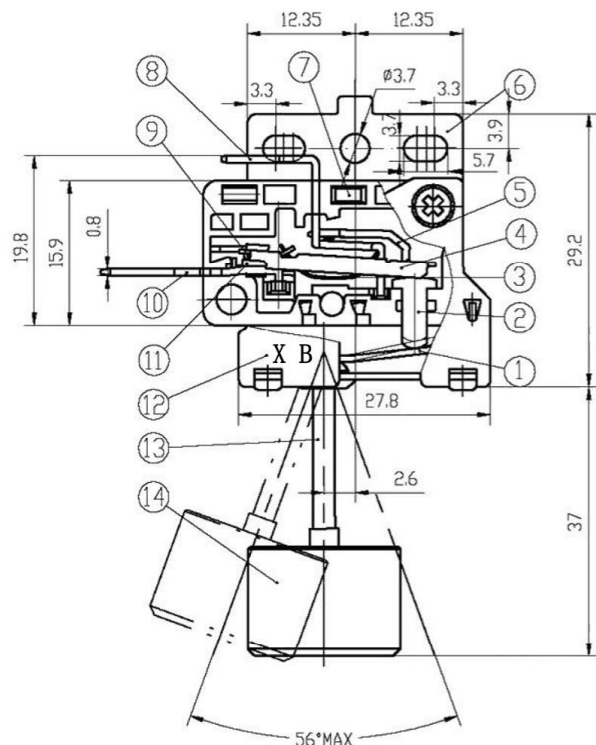

SCHEMATIC DIAGRAM



3. Safety authentication 安全认证



1. Specifications 技术特性表

RATINGS 额定值 ELECTRONICAL LIFE 电气寿命 TEMPERATURE 温度等级	16GPA 125/250VAC μ 40T105 5E4 1/3hp 125VAC 10A 30VDC
	16(4)A 125/250VAC μ 40T105 5E4 10A 30VDC 40T105 5E4
	16(4)A 250VAC μ 10T105 5E4
INSULATION STRENGTH 绝缘电阻	100M Ω MIN
TEST VOLTAGE 耐电压	AC1000V/2000V
CONTACT RESISTANCE 接触电阻	50m Ω MAX
OPERATING FORCE 动作力	1.2N MAX

项目 Item		特性值 Value	
		C型 C type	D型 D type
温度等级 Degree of temperature		10T105	
额定电压 Rated voltage		AC250V	
绝缘电阻 Insulation resistance		$\geq 100M\Omega$ (500VDC)	
接触电阻 Contact resistance		$\leq 30m\Omega$ (初始值 initial value)	
耐电压 Test voltage	同极性不相端子間 Between not connect terminals of the same polarity	AC1000V, 50/60Hz, 1min	
	帶電金屬零件與地(外殼)之間、接線端與不帶電金屬件之間 Between current-carrying metal parts and ground(case), and between each terminal and non-current-carrying metal parts.	AC3750V, 50/60Hz, 1min	
電氣壽命 Electrical life		50,000次/cycles	
質量 Weight		約57 g/approx. 57g	約58 g/approx. 58g

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : $\pm 0.1mm$	A	2012-9-25	初版		ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2mm$	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch			UNIT : mm	DRWG NO.: XB-KW3A-C16DX	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-KW3A-C16DX			SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED						2012-9-25
1	KNOB	PPA	1	BLACK					CHK'D	DONG. PANG
										2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					APPD.	ZENQ. CHEN
										2012-9-25