


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

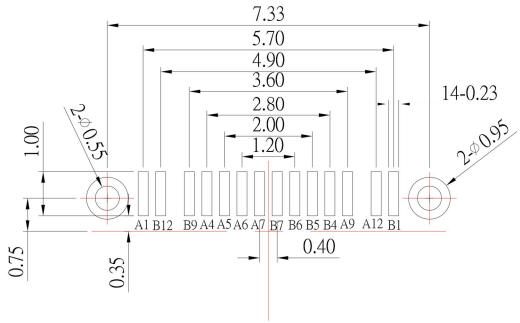

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS

Electrical:




- Rating: 30V DC , 3.0 A
- Dielectric Withstand Voltage: 500V AC
- Contact Resistance: 30 mΩ Max
- Insulation Resistance: 1000 MΩ Min

Material:

- Housing: LCP
- Contact: C7025
- Mid Plate: SUS

Finish:

- Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- Mid Plate: Tin under Plated surface layer

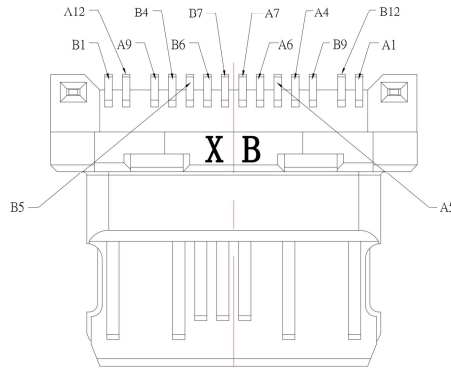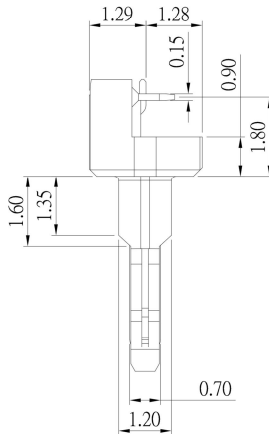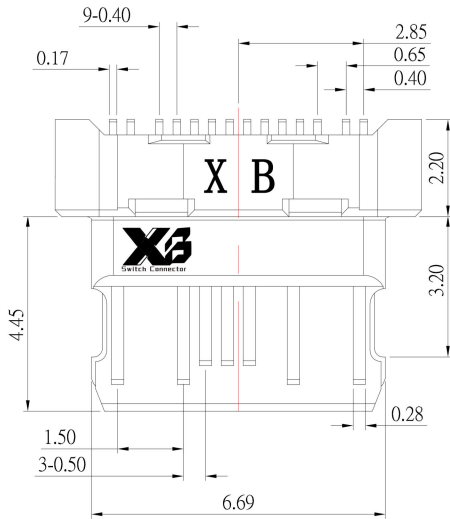

4	新增尺寸	Jack	080522
3	新增尺寸	Jack	052322
2	更新Contact材質	Jack	101821
1	更新材質	Jack	123120
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	08/05/22
CHECKED BY:	DATE
Jacky Chen	08/05/22
APPROVED BY:	DATE
Tony Kao	08/05/22

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	USB TYPE C 2.0 卡勾沉板
SCALE	1 : 1	DWG NO.	SBC-140M2-202-S412
SHEET NO.	1 of 1	PART NO.	SBC-140M2-202-S412
		SIZE	A4
		VER	R4