
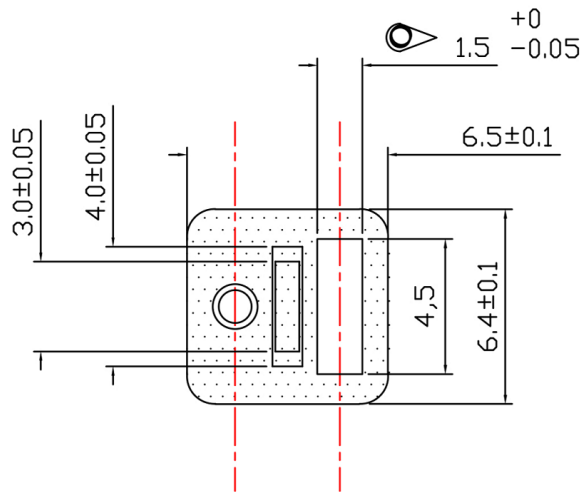


ROHS

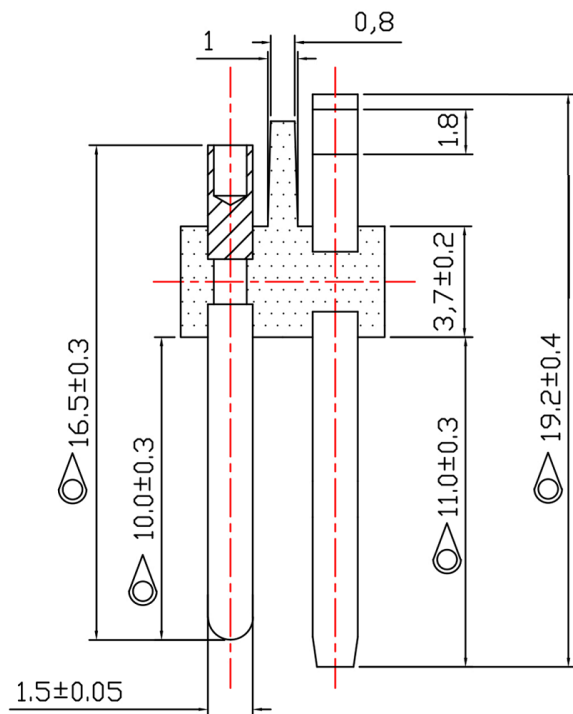

技术要求:

1. 铜片/铜针无刮伤. 露铜. 漏压线。
2. 电镀无氧化、无脱皮、易上锡。
3. 盐雾24H以上。

Technology Request:

1.Outlook:

No burr, no hurt.

2.Electronic performance:

a:Insulation resistance:

Above DC500V/100MΩ;

b:Endure voltage:

AC500V at 1 minute;

c:Contact resistance:

Under 30mΩ;

3.Insertion force & withdrawal force:

0.3~3kgf.

4.Salt spray test:24H.

5.Meet RoHS.

6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7			
比例 Scale	5:1	xx.:±0.3	6			
视图 Third angle projection		x.x:±0.1	5			
		.xx:±0.05	4			
			3		H65	Ni 1~3um
			2		C3602	Ni 1~3um
			1	PLASTIC	PBT	BLACK
			NO.	PART	MATERIAL	PLATING

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
贺龙飞	赖海杰	龙柳婷

规格 DESCRIPTION:	品名 P/N:	图号 DRAWN NO:
DC PLUG	XB-DC-T10198	2PIN充电针