

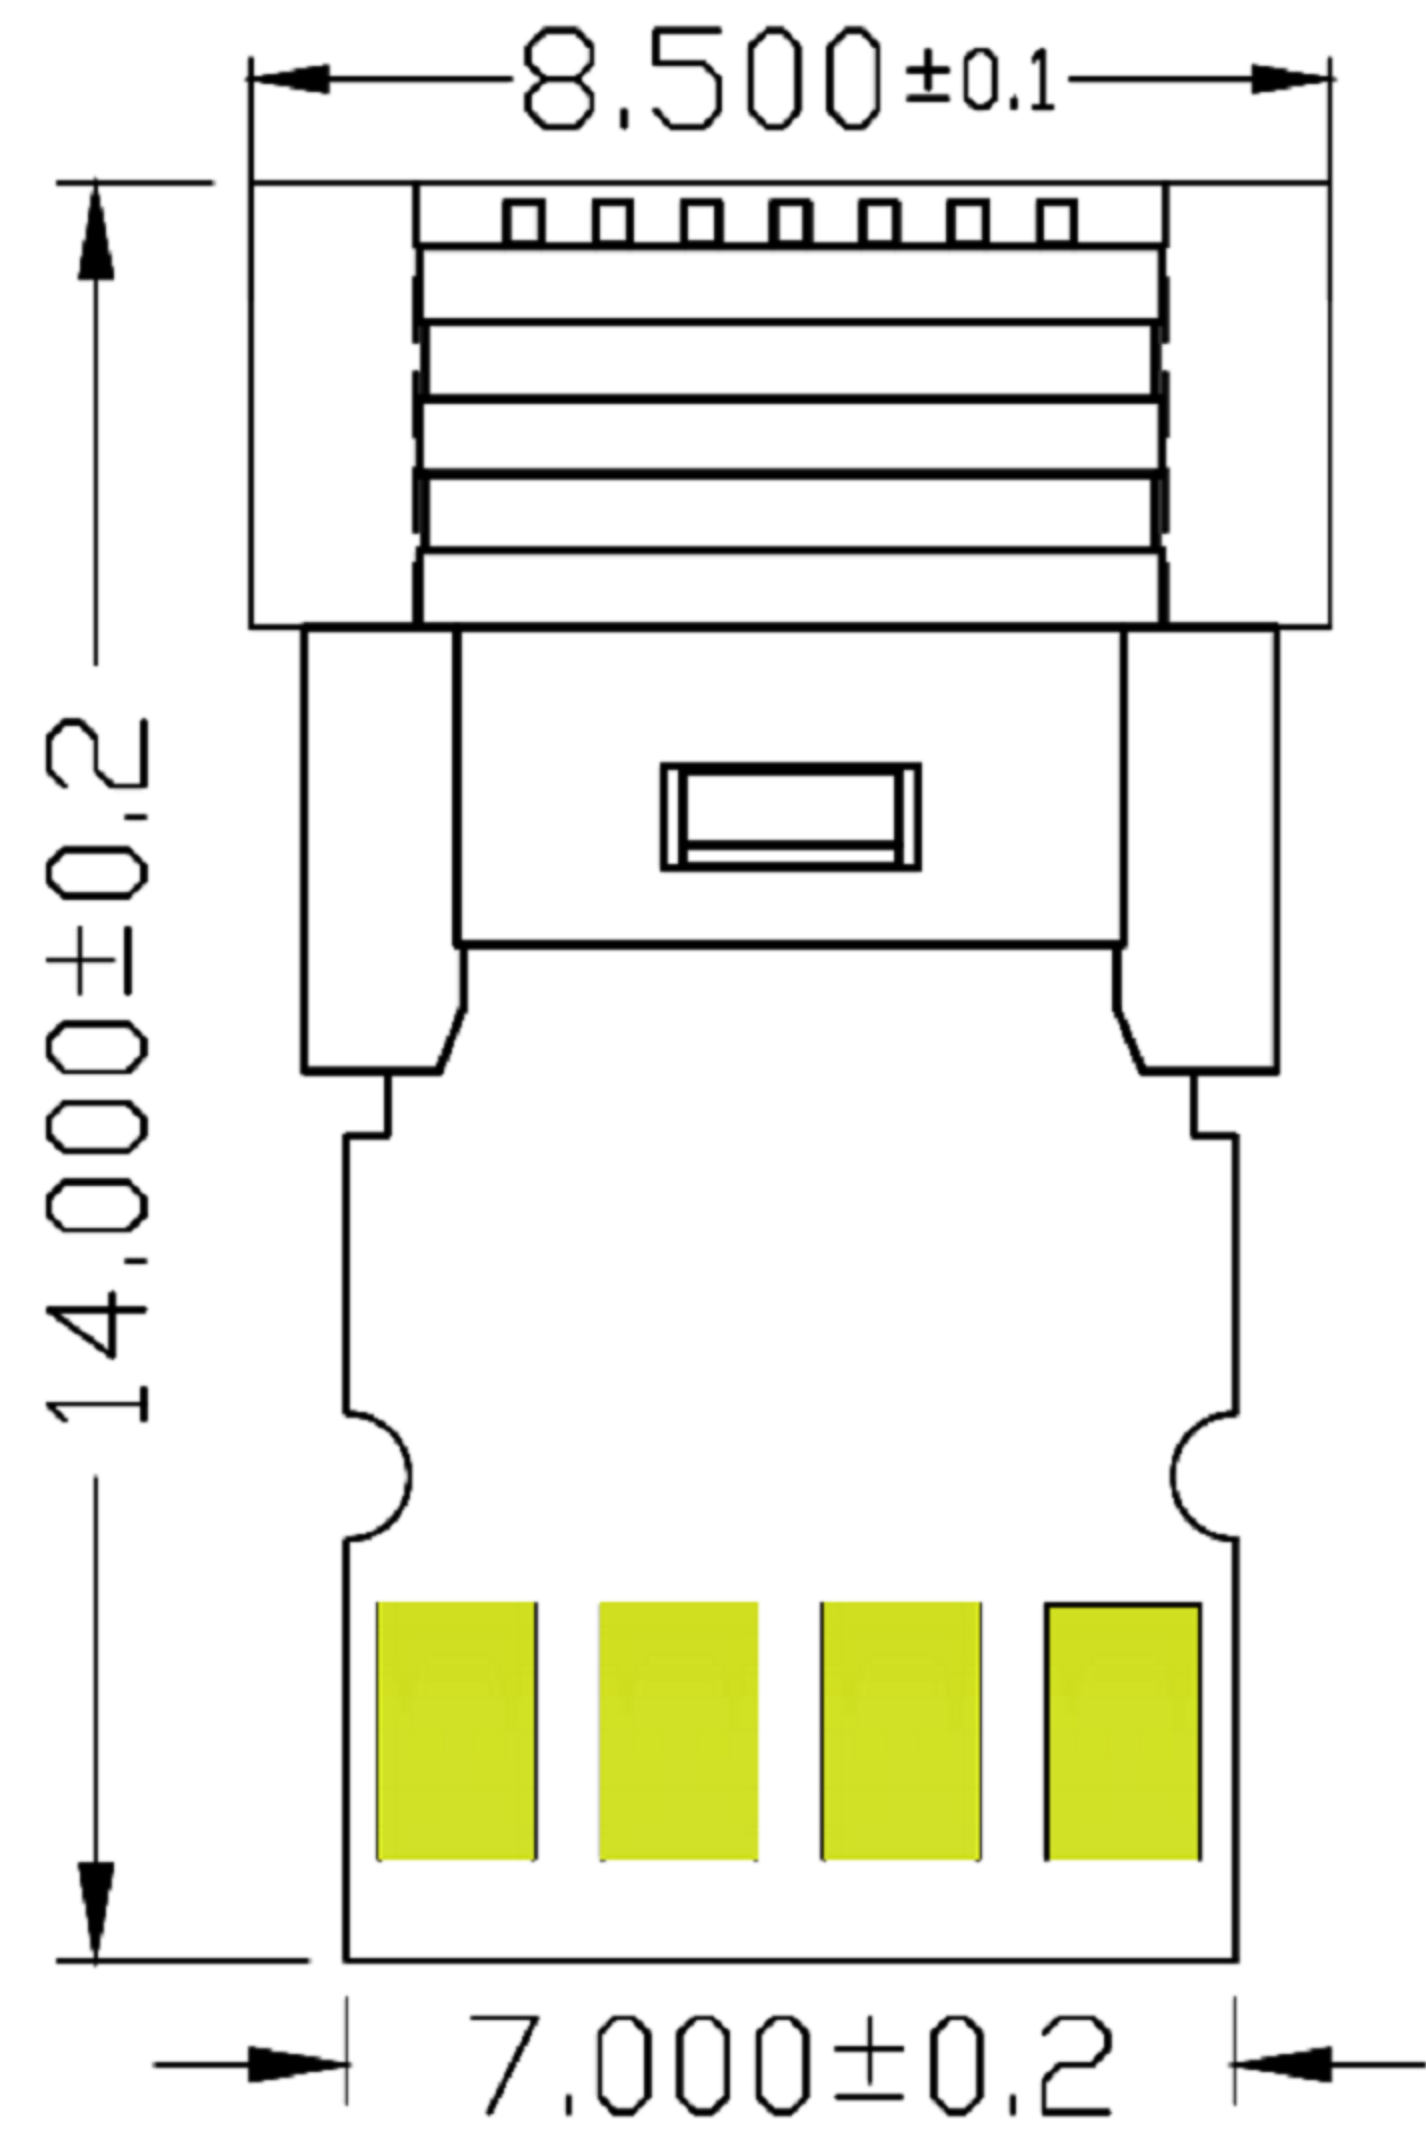


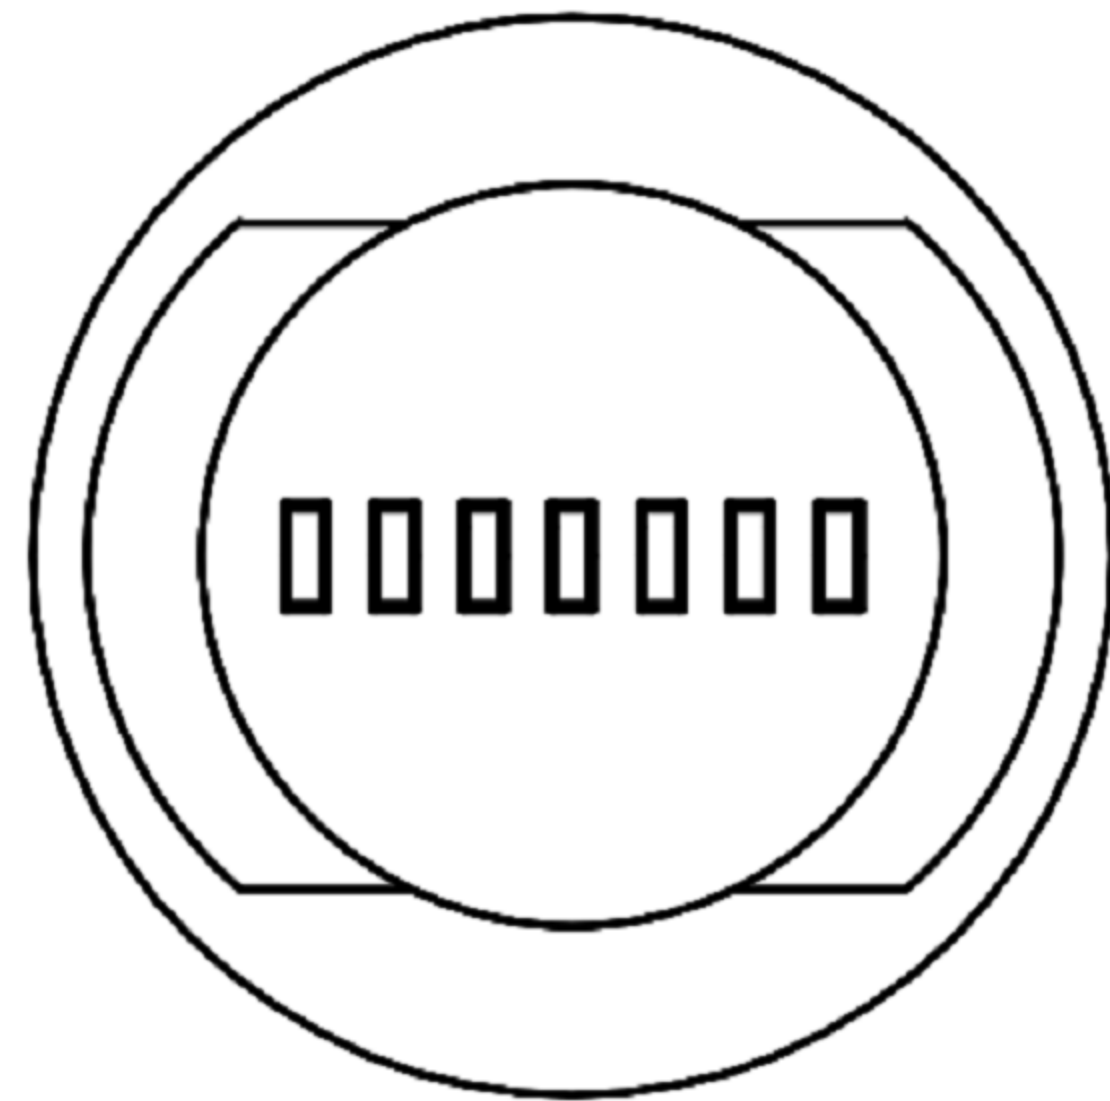

1	PCB板	正反两面带常亮蓝灯，沉金板；镀金2u T=0.8	1	PCS
2	端子	7025R-EH T=0.15mm 按客户要求镀金；镀锡100u”，镀镍50u”；	1	PCS
3	胶芯	LCP+30%GF, UL94V-0 (改性+树脂40%)，白色，耐温280° ；	1	PCS
4	磁铁	磁性N40 镀铜镍150u T=3.50	1	PCS

图为焊盘位置和大小

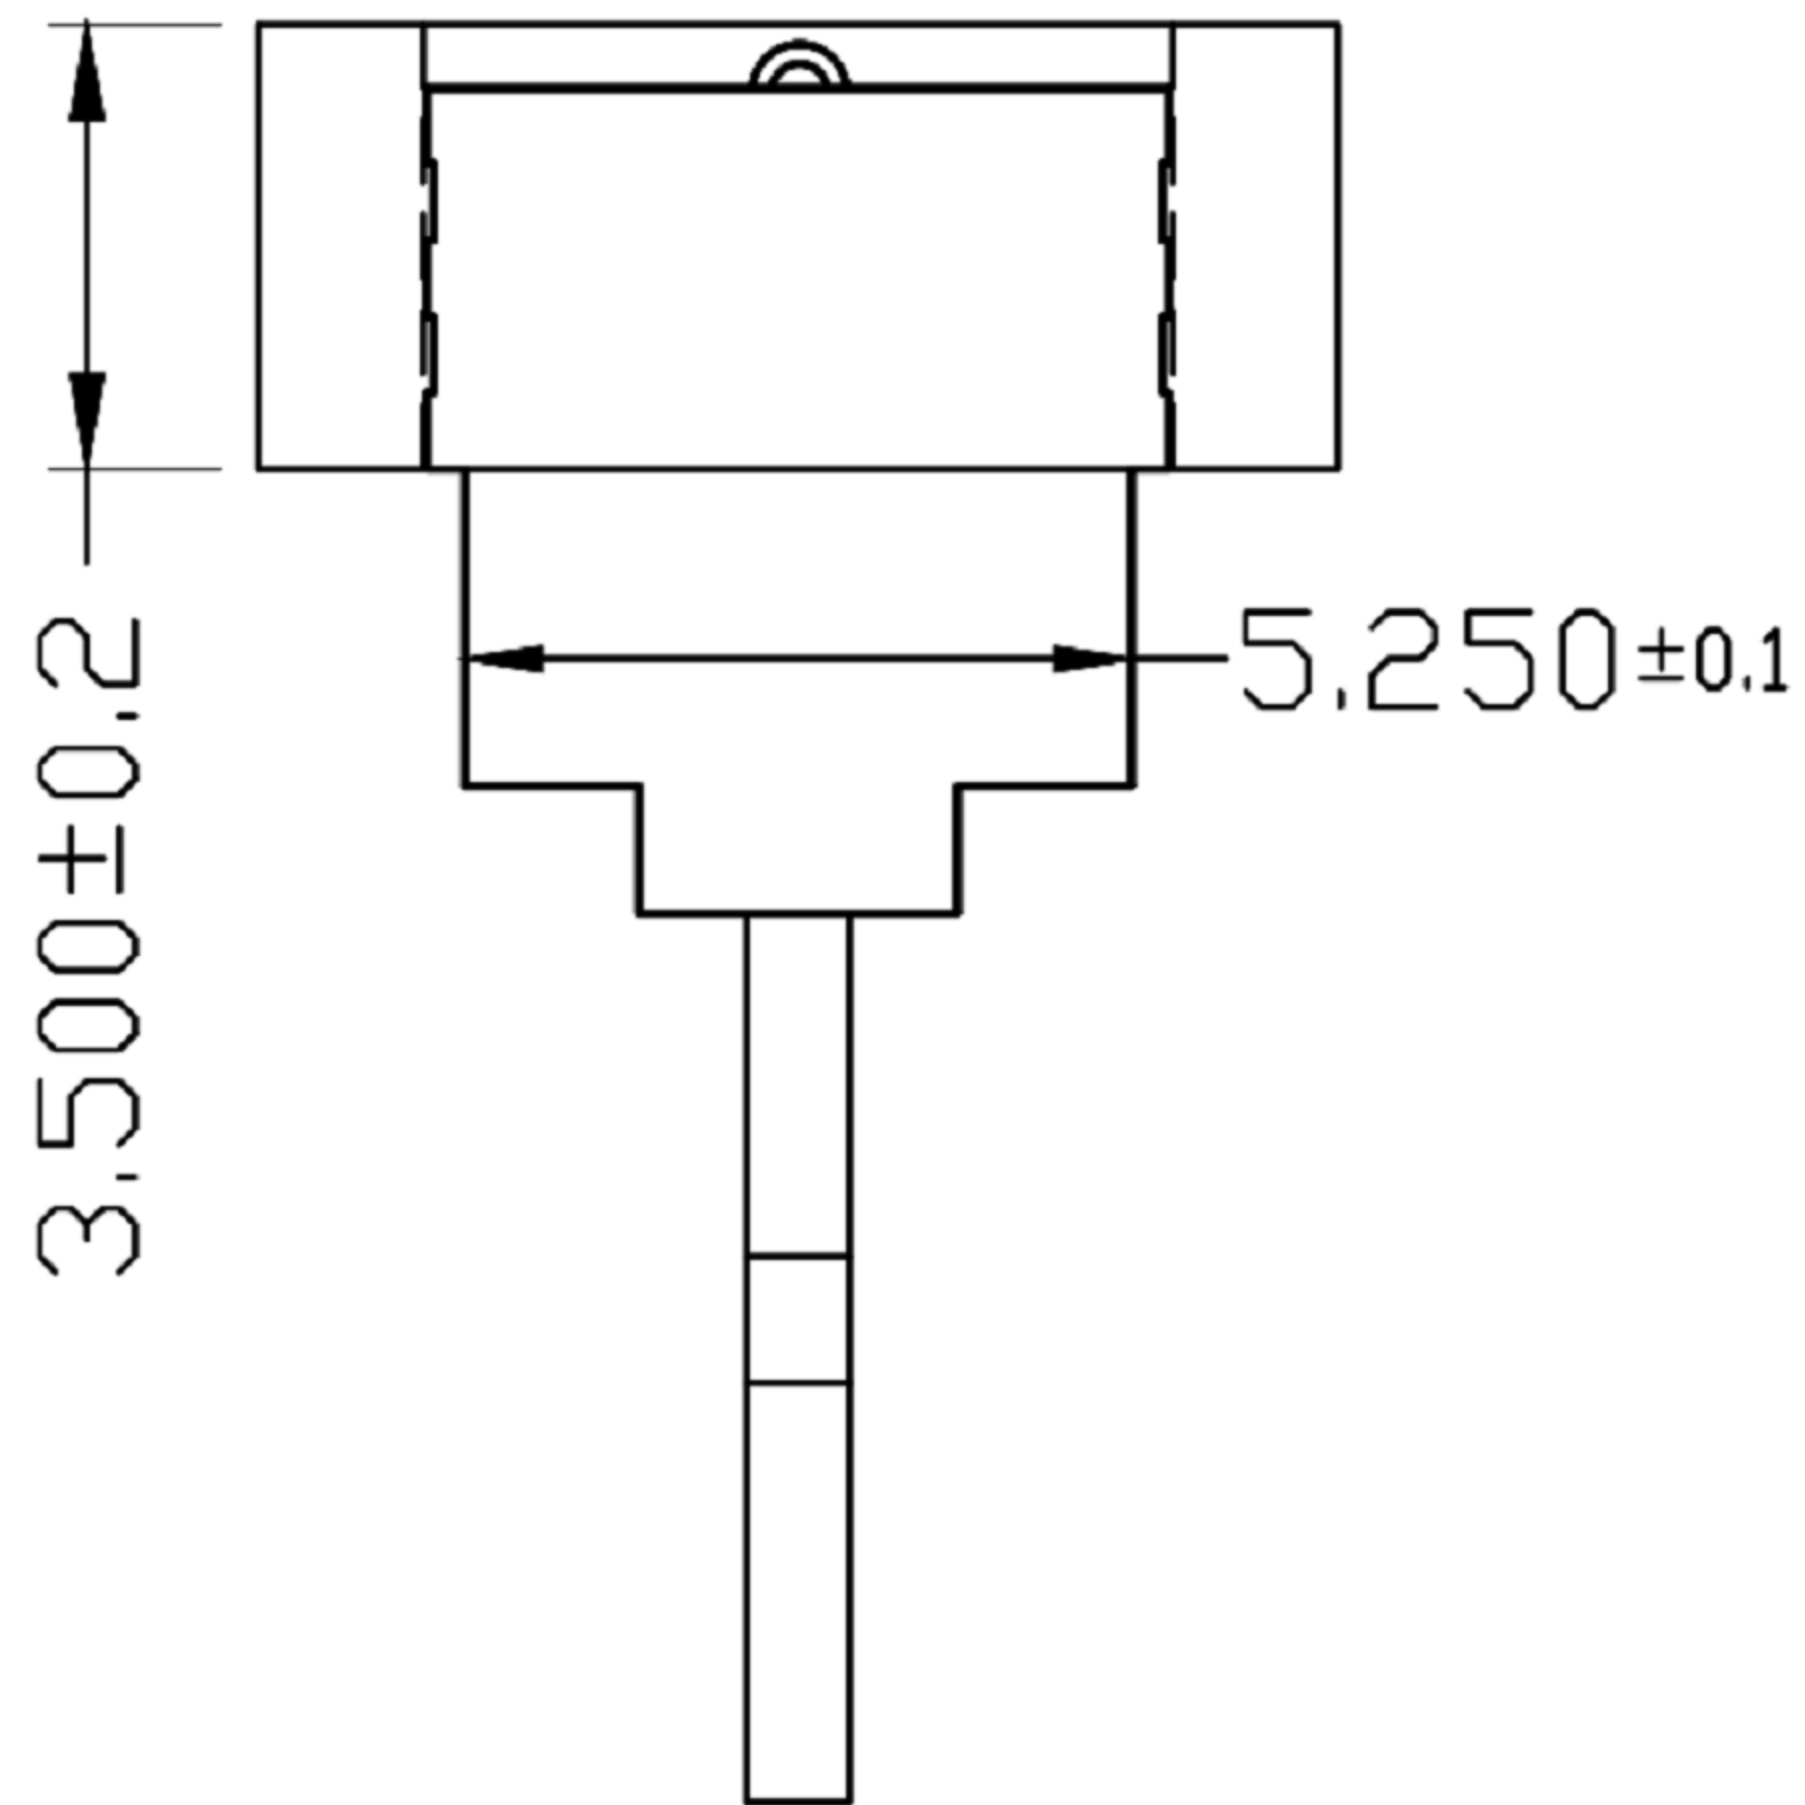


东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 04/01/21

CHECKED BY: DATE

Jacky Chen 04/01/21

APPROVED BY: DATE

Tony Kao 04/01/21

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

磁吸DC插座连接器

MAGNETIC CONNECTOR

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------